

# tempmate.®-S1 V2

➔ Single-Use USB Data Logger for Cold Chain Temperature Monitoring



1 Depending on Storage Conditions | 2 Depending on Configuration | 3 Background Logging, even if stopped too early



PHARMACEUTICAL  
PRODUCTS



FOOD & PRODUCE



TECHNICAL  
PRODUCTS

## Outstanding Single-Use Temperature Logger, for Reliable Cold Chain Monitoring.

The new **tempmate.®-S1 V2** loggers have an integrated USB port and PDF & CSV generating software on-board, so no further software or hardware is required to connect the logger and read the recorded temperature data.



tempmate.com



USB  
Connection



IP 67  
Protected



Temperature Range  
-30°C to +70°C



EN 12830  
Compliant




Automatic PDF  
& CSV Report




Germany  
Quality

# tempmate.®-S1 V2


If temperature matters.

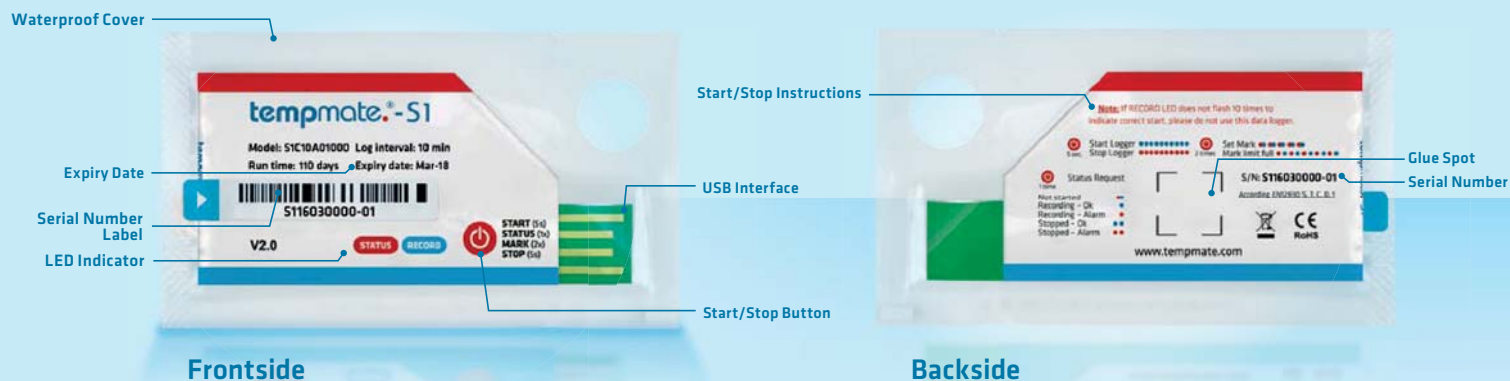


## Easy Handling




01 Preconfigured and ready to use



02 Add started tempmate.®-S1 to your Shipment



03 Connect stopped Logger directly to USB Port



04 Automated PDF & CSV Report with all Details

## Curious about your Cold Chain?

tempmate.®-S1 continuously monitors all relevant data.

tempmate.®-S1 loggers are specially designed for temperature monitoring in any cold chain logistics. As a pre-programmed device tempmate.®-S1 can be instantly used to monitor your temperature sensitive consignment. The automatically created PDF and CSV report, containing detailed information such as data curve, every single measurement as a table and statistical information. The optional **tempbase.®** software for data management and reprogramming can be downloaded for free.

## Your Benefits at a Glance

- + Cost-Effective and Reliable
- + Smart Design, Intuitive Operation
- + Waterproof and Food Grade Packing
- + No Additional Hardware or Software Required
- + Detailed PDF and CSV Report Including Graph and Table
- + Intelligent LEDs for Status Monitoring
- + Extended Shelf-Life of 2 Years
- + Reprogrammable

## Technical Specifications

Recording Options	Single-Use
Temperature Range	-30 °C to 70 °C
Temperature Accuracy	±0.5 (-20°C/+40°C); ±1.0 (other range)
Temperature Resolution	0.1 °C
Data Storage Capacity	16.000 readings
Shelf Life / Battery	2 years <sup>1</sup> / CR2450 button cell
Recording Interval	10 minutes (standard, others on request)
Recording Duration	up to 110 days <sup>2</sup> (standard, others on request)
Startup Mode	Button or software
Stop Mode	Button, software or stop when full
Protection Class	IP67 / NEMA 6
Dimensions	83 mm x 47 mm x 7 mm (L x W x H)

Weight	14.6 g
Certifications	EN 12830, CE, RoHS
Validation Certificate	Hardcopy and PDF file in memory
Software	PDF or CSV Reader / <b>tempbase.®</b> optional
Report Generation	Automatic PDF & CSV report
Password Protection	Optional on request
Connection Interface	USB 2.0, A-Type
Alarm Configuration	Optional, up to 5 points
Reprogrammable	Yes, with free <b>tempbase.®</b> software
Accessories incl.	Shipping Documents, Certificate, Reprogram Label and Seal-Bag

1 Depending on optimal storage conditions (+15°C to +23°C / 45% to 75% rH)  
2 Depending on application temperature (very low / high temperatures may shorten it)

Temp | Humidity | Pressure | Vacuum | Data Loggers | Calibrators | Gas Detectors | Pharma / HVAC Solutions | Projects

**Instrukart Holdings**

India Toll Free : 1800-121-0506 | Ph : +91(40)40262020 | Mob : +91 8886550506

Email : [cs@instrukart.com](mailto:cs@instrukart.com) | Web : [www.instrukart.com](http://www.instrukart.com)

#18, Street-1A, Czech Colony, Sanath Nagar, Hyderabad-500018, INDIA.

<https://www.youtube.com/instrukartholdings>



**INSTRUKART**

YOUR WORLDWIDE INSTRUMENT PARTNER